


Straight Blade Devices Industrial Extra Heavy-Duty Specification Grade Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V




- | Features | |
|---|---|
| <ul style="list-style-type: none"> ■ One-piece brass mounting strap with integral ground. ■ Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body. ■ Two drive screws anchor strap to back body and face. ■ Exclusive patented feature, circuit label on face allows permanent circuit identification. ■ .036 inch thick, brass, triple-wipe power contacts for lasting retention. ■ Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring. ■ Impact-resistant nylon face and back body. ■ Oversized #10 deep tri-drive head brass terminal and ground screws. | <ul style="list-style-type: none"> ■ Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation. ■ External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection. ■ Line terminals accept #14 – #10 AWG stranded or solid copper clad conductors. ■ Auto-ground clip assures positive ground. ■ Corrosion-resistant models have nickel-plated straps and contacts. |

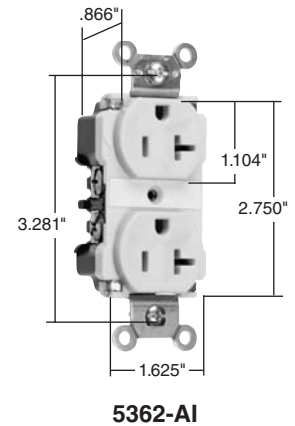

Catalog Number	Rating		Color	NEMA Config. No.	3rd Party Compliance		
	A.	V.			UL UL498	FSUL WC596	CS C22.2 No. 42
Duplex Receptacles Back & Side Wire							
5262-AI	15	125	Ivory	5-15R	•	•	•
5262-AW	15	125	White	5-15R	•	•	•
5262-A	15	125	Brown	5-15R	•	•	•
5262-AGRY	15	125	Gray	5-15R	•	•	•
5262-ABK	15	125	Black	5-15R	•	•	•
5262-ARED	15	125	Red	5-15R	•	•	•
5262-ALA	15	125	Light Almond	5-15R	•	•	•
*CR6200	15	125	Yellow	5-15R	•	•	•
5362-AI	20	125	Ivory	5-20R	•	•	•
5362-AW	20	125	White	5-20R	•	•	•
5362-A	20	125	Brown	5-20R	•	•	•
5362-AGRY	20	125	Gray	5-20R	•	•	•
5362-ABK	20	125	Black	5-20R	•	•	•
5362-ARED	20	125	Red	5-20R	•	•	•
5362-ALA	20	125	Light Almond	5-20R	•	•	•
*CR6300	20	125	Yellow	5-20R	•	•	•
5662-AI	15	250	Ivory	6-15R	•	•	•
5662-AW	15	250	White	6-15R	•	•	•
5662-A	15	250	Brown	6-15R	•	•	•
5662-AGRY	15	250	Gray	6-15R	•	•	•
5662-ABK	15	250	Black	6-15R	•	•	•
5662-ARED	15	250	Red	6-15R	•	•	•
5862-AI	20	250	Ivory	6-20R	•	•	•
5862-AW	20	250	White	6-20R	•	•	•
5862-A	20	250	Brown	6-20R	•	•	•
5862-AGRY	20	250	Gray	6-20R	•	•	•
5862-ABK	20	250	Black	6-20R	•	•	•
5862-ARED	20	250	Red	6-20R	•	•	•
5862-ALA	20	250	Light Almond	6-20R	•	•	•

*Corrosion-Resistant.

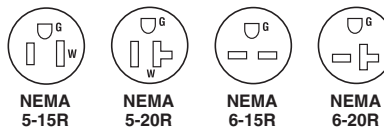

All devices listed on this page conform to NEMA WD-1.