

Technical Specifications Industrial Extra Heavy-Duty Specification Grade Receptacles


Back & Side Wire 2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

Pass & Seymour
Legrand®

Technical Specifications

Typical Specifications

Manufacturer's Identification: Pass & Seymour/Legrand 5262-A
Description: Straight Blade Duplex Receptacle – Industrial Extra Heavy-Duty Specification Grade
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
Configuration: NEMA 5-15R
3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Federal Specification WC596.
CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42.

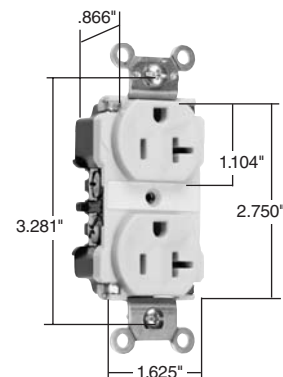

15 & 20 Amp



NEMA
5-15R



NEMA
6-15R



NEMA
5-20R



NEMA
6-20R

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
□ 5262-AI	Ivory	15A 125V	5-15R	□ 5362-AI	Ivory	20A 125V	5-20R
□ 5262-AW	White	15A 125V	5-15R	□ 5362-AW	White	20A 125V	5-20R
□ 5262-A	Brown	15A 125V	5-15R	□ 5362-A	Brown	20A 125V	5-20R
□ 5262-AGRY	Gray	15A 125V	5-15R	□ 5362-AGRY	Gray	20A 125V	5-20R
□ 5262-ABK	Black	15A 125V	5-15R	□ 5362-ABK	Black	20A 125V	5-20R
□ 5262-ARED	Red	15A 125V	5-15R	□ 5362-ARED	Red	20A 125V	5-20R
□ 5262-ALA	Lt. Al.	15A 125V	5-15R	□ 5362-ALA	Lt. Al.	20A 125V	5-20R
□ 5662-AI	Ivory	15A 250V	6-15R	□ 5862-AI	Ivory	20A 250V	6-20R
□ 5662-AW	White	15A 250V	6-15R	□ 5862-AW	White	20A 250V	6-20R
□ 5662-A	Brown	15A 250V	6-15R	□ 5862-A	Brown	20A 250V	6-20R
□ 5662-AGRY	Gray	15A 250V	6-15R	□ 5862-AGRY	Gray	20A 250V	6-20R
□ 5662-ABK	Black	15A 250V	6-15R	□ 5862-ABK	Black	20A 250V	6-20R
□ 5662-ARED	Red	15A 250V	6-15R	□ 5862-ARED	Red	20A 250V	6-20R
				□ 5862-ALA	Lt. Al.	20A 250V	6-20R

Performance

Electrical

Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical

Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device

Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

Materials

Face	Nylon	Terminal Screws	#10 Tri-Drive Brass (Neutral = Nickel-Plated Steel)
Back Body	Nylon	Ground Screw	#10 Hex Tri-Drive Brass
Line Contacts	.036 688 Brass	Assembly Drive Screw	Zinc-Plated Steel
Mounting Strap	.050 688 Brass	Auto-Ground Clip	Brass
Ground Contacts	Strap with Integral Ground	Mounting Screws	Tri-Drive Steel
Pressure Plate	.031 260 Brass		

Consult Straight Blade Section B for complete compliance listing.

Industrial Extra Heavy-Duty Receptacles