

FURUTECH

PURE TRANSMISSION

New for 2006!

High End Performance RCA Terminal Sockets

FP-901(G)



Dimensions:

Housing: 16mm diameter x 19.5mm length (Black)

Mounting Insulation: Nylon (Red/White) 17.3mm diameter x 7.3mm thick, 39.0mm overall length

FP-901 (G) Red and White Non-magnetic 24k Gold-Plated Conductor (2 Pcs/ Set)

Features:

- Positive/Hot Center Pin: Milled from a single piece of pure copper α (Alpha) conductor with phosphor bronze locking ring
- Negative/Cold Conductor: Milled from a single piece of pure copper α (Alpha) conductor
- Non-magnetic 24k gold-plated materials
- Eutectic brass housing (painted black) and 24k gold-plated nut cap
- Mounting Materials: Nylon (red or white /outer) and PETF Teflon (white/inner) insulation
- Mounting Insulation accommodates chassis panels of any thickness
- Connection Type: Soldered




All metal parts are treated with the

**FURUTECH α (Alpha) Process (Super Cryogenic & Demagnetizing Treatment.)*

Make a More Powerful Connection with FURUTECH

FURUTECH CO., LTD.
service@furutech.com

Panel Cut-out Size for RCA socket FP-901 series

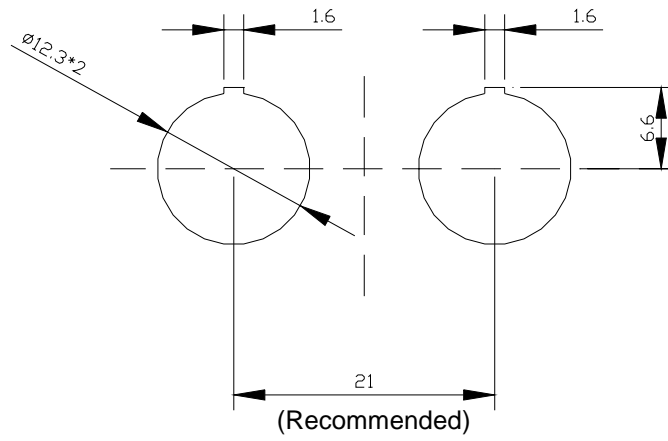

Drilling scheme
(Original size)