

FURUTECH

PURE TRANSMISSION



Furutech's Ultimate Power Connector Series FI-52 NCF Piezo Ceramic Series



FI-52 NCF (R) / FI-52M NCF (R)

Rhodium Plated Non-magnetic conductors • Type: 2-pole + earth

NCF Piezo Ceramic Series Connectors • A Furutech First!

Furutech's Pure Transmission FI-52 NCF Piezo Ceramic series connector bodies and housings feature several breakthrough construction techniques.

A multilayer nonmagnetic stainless steel and silver plated carbon fiber shell incorporates a special damping and insulating acetal copolymer. Furutech settled on stainless and silver plated carbon fiber for the outer housing after extensive listening sessions with Japanese industry figures and audiophiles.

The body of the connectors incorporates an "active" damping material: **Nano Crystal² Formula** - Nano Crystalline, Ceramic and Carbon Powder

Incorporated into select Furutech products, Nano Crystal² Formula --- **NCF** is comprised of a special crystalline material that has two "active" properties. First, it generates negative ions that eliminate static and secondly, it converts thermal energy into far-infrared. Furutech then combines this remarkable crystalline material with nano-sized ceramic particles and carbon powder for their additional "Piezo Effect" damping properties. The resulting Nano Crystal² Formula is the ultimate electrical and mechanical damping material – only found in Furutech products!

Nano Crystal² Formula eliminates static, "interconverts" thermal, mechanical and electrical energy and

damps vibrations—all for the finest Furutech Pure Transmission signal imaginable.

Floating Magnetic Field Effects

The Furutech Earth/Ground Jumper System

How far will Furutech’s engineers go in their attempts to reach Pure Transmission reference quality?

Their concentrated examination of each and every element of signal transfer has resulted in another breakthrough technology, the Furutech Earth/Ground Jumper System. It eliminates EMI (Electromagnetic Interference) induced in metal parts like connector housing screws.

Current flowing through the power connector creates a magnetic field, just as an insulated conductor creates both electromagnetic and electrostatic fields. Furutech engineers found this magnetic field induces current flow (and a small magnetic field) in the screws holding the connector together! These magnetic fields interfere with the larger magnetic field around the conductor and connector.


Furutech’s total attention to detail and elegant engineering neatly solves the problem. The Earth/Ground Jumper System connects the securing screws to a ground terminal within the plug completely eliminating the field disturbances they cause. The stray fields are grounded by a series of interlocking parts within the connector that attach to the ground conductor. The Jumper System is available in Furutech NEMA Power and IEC Connectors.

The Earth/Ground Jumper System Carries US Patent No. 6,669,491

Features

- α (Alpha) Pure-Copper Rhodium-plated Conductor
- Earth (Ground) Jumper System (US Patent No.: 6,669,491/European:EP1445837)
- Nylon/fiberglass body with a special anti-resonance nano-sized crystalline, piezo ceramic particles and carbon damping material
- Multilayered nonmagnetic stainless steel and silver plated carbon fiber housing incorporating an acetal copolymer. The best of damping and insulation materials improve frequency extension and tonal balance
- Specified for cable diameters from 6mm to 20mm
- Dimensions:
 - FI-52 NCF Body length 41.1mm x 34.5mm diameter / 77.2mm overall length
 - FI-52M NCF Body length 40mm x 34.5mm diameter / 75.8mm overall length
- Metal cable clamp improves grip and reduces mechanically and electrically induced distortion
- Rating: FI-52 NCF---20A 125V /16A 250V AC
 - FI-52M NCF---20A 125V AC

Specially Engineered Wire Clamp

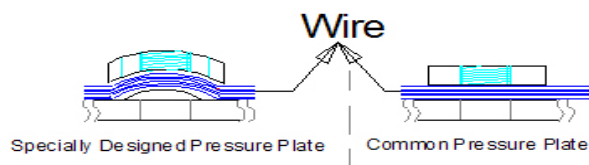

Make A More Powerful Connection with Furutech!

FURUTECH CO., LTD • service@furutech.com • www.furutech.com

Product name	Product Introduction	JAN CODE
FI-52 NCF (R)	IEC Power Connector	
FI-52M NCF (R)	AC Power Connector	