

FURUTECH

PURE TRANSMISSION

AEx

オーディオ銘機賞
Audio Excellence Award 2008



High Performance Duplex Receptacles



FPX - (G)



FPX - (Cu)



FPX - (R)

Features: All non-magnetic α (Alpha) Phosphor bronze Conductor
All models c(UL) approved

Specifications:

Accommodates cable diameters from 10 AWG to 24 AWG.

Dimensions: 104.2mm×33.5mm (L×W), 28.2mm thick.

Materials: Main body: Nylon and Fiber Glass

Cover: White polycarbonate for FPX- (R) and (G), Black for FPX - (Cu)


Connections: Set-screw

Non-magnetic Rhodium, 24k Gold or Non plated


Phosphor Bronze conductor (t: 0.8 mm)

Rating: 2-pole+earth for North America: 20A 1 25V A.C

Furutech's total attention to detail and build quality extends right down to a specially designed patent-pending pressure plate that increases the contact area of Conductors.

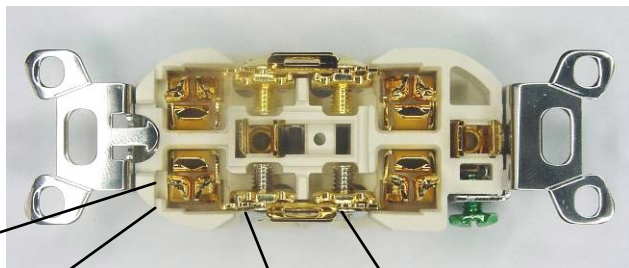

Regular Clamp

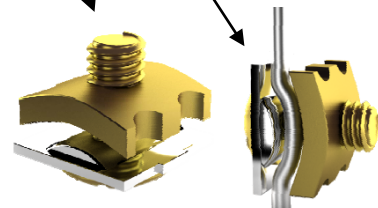

Furutech Patent Pending Clamp
Contact Area Calculated Increase: 17.142%

Unique pin insert construction ensures increased contact areas, stable transmission and the tightest contacts in the Audio industry **and they won't scratch or mark the plating on male AC connectors!**

All metallic parts are treated with the

**FURUTECH α (Alpha) Process (Super Cryogenic & Demagnetizing Treatment.)*

FURUTECH CO., LTD. service@furutech.com

Make A More Powerful Connection with Furutech!