

FURUTECH

PURE TRANSMISSION

AEx

オーディオ銘機賞

Audio Excellence Award 2008




New 2011! High Performance Wall Plate for Duplex /Single Outlets



GTX Wall Plate


- Beautifully crafted special grade aluminum CNC processed chassis effectively shields against RFI (Radio Frequency Interference).
- Material thickness: chassis plate 13.0mm
- Finished with an extremely effective nonresonant coating.
- Includes Special Teflon damping foil and SUS Receptacle fixed screw 4 pcs (M3) and SUS Plate fixed screw 2 pcs (50mm overall length).
- Suitable for use with GTX-D or GTX-S receptacle and 104-D or 104-S carbon fiber finished cover.
- Dimensions: 135.0mm (L) x 86.0mm (W) x 13.0mm(H) -0/+0.3mm

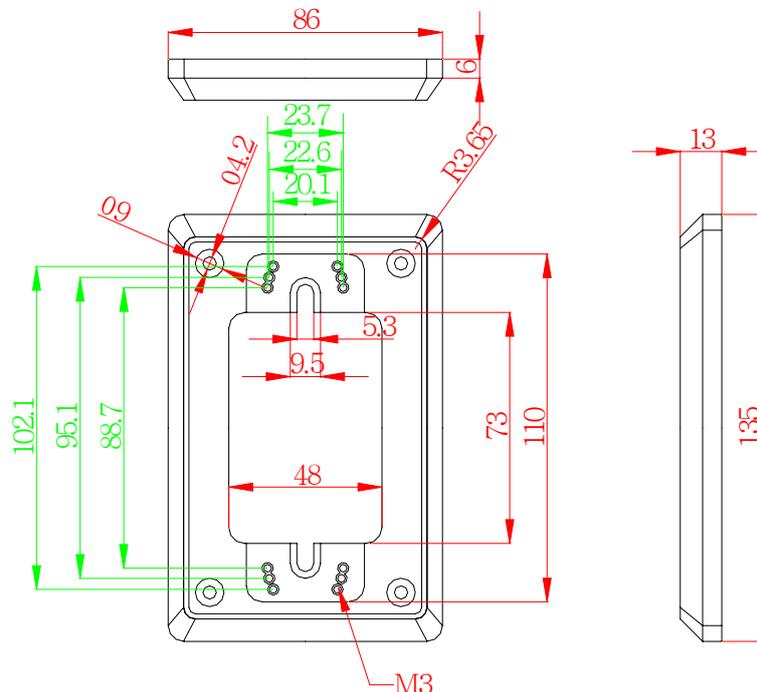

GTX Wall plate fitted with GTX-D receptacle and 104-D cover and image of the special Teflon damping sheet.



GTX Wall Plate packaged image

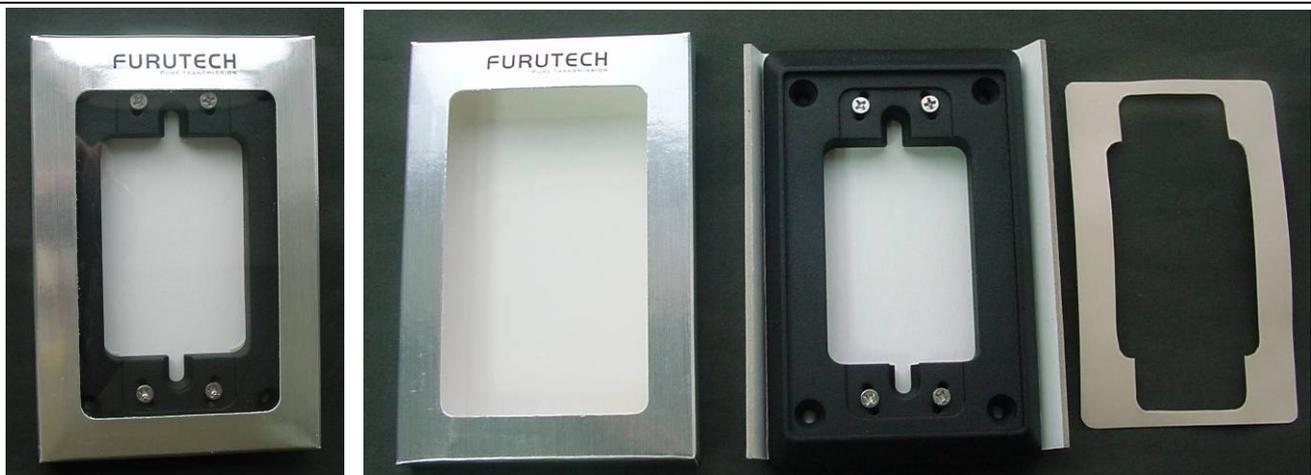

All metallic parts are treated with the

**FURUTECH α (Alpha) Process (Super Cryogenic & Demagnetizing Treatment.)*

FURUTECH CO.,LTD service@furutech.com

Make A More Powerful Connection with Furutech!